

IQ7 Series Microinverters

The high-powered smart grid-ready Enphase IQ7 Series Microinverters dramatically simplify the installation process while achieving the highest system performance.



Q-DCC-2 adapter cable

Connect PV modules quickly and easily to IQ7 Series Microinverters using the included Q-DCC-2 adapter cable with plug-and-play MC4 connectors.



IQ Cables

The IQ Cables allow quick and safe connection of the microinverters. With 3P variants, the installed capacity is automatically distributed evenly across all three phases.



IQ Gateway

The IQ Gateway is the platform for energy management and integrates with the IQ Microinverters and IQ Batteries to provide complete control and insights into the Enphase Energy System.



IQ Relay single-phase and multi-phase

Production and storage, circuit integrated, NS-protection device with PLC-Phase coupler (3P) and DC current injection monitoring*.

Easy to install

- Lightweight and compact with plug-and-play connectors
- Power line communication (PLC) between components
- Familiar AC cabling architecture

High productivity and reliability

- More than one million cumulative hours of testing
- Class II double-insulated enclosure
- Safer AC cabling methods

Smart grid-ready

- Complies with the latest advanced grid support
- Remote automatic updates for the latest grid requirements
- Configurable to support a wide range of grid profiles



IQ7 Series Microinverters redefine reliability standards with more than one million cumulative hours of power-on testing, enabling an industry-leading limited warranty of up to 12 years.**

* IQ Relay is not required in all countries, check local grid connection requirements to confirm.





** 12-year warranty is valid, provided an internet-connected IQ Gateway is installed.

IQ7 Series Microinverters

INPUT DATA (DC)		UNITS	IQ7PLUS-72-2-INT		IQ7A-72-2-INT	
Typical module compatibility			60-cell/120-half-cell 66-cell/132-half-cell 72-cell/144-half-cell			
Minimum/Maximum input voltage	U_{dcmin}/U_{dcmax}	V	16/60		18/58	
Start-up input voltage	$U_{dcstart}$	V	22		33	
Rated input voltage	$U_{dc,r}$	V	36		40.5	
Minimum/Maximum MPP voltage	U_{mppmin}/U_{mppmax}	V	27/45		38/43	
Minimum/Maximum operating voltage	U_{opmin}/U_{opmax}	V	16/60		18/58	
Maximum input current	I_{dcmax}	A	12		10.2	
Maximum short-circuit DC input current	I_{scmax}	A			25	
Maximum module I_{sc}		A			20	
Maximum input power	P_{dcmax}	W	440		575	
OUTPUT DATA (AC)		UNITS	IQ7PLUS-72-2-INT		IQ7A-72-2-INT	
Maximum apparent power	$S_{ac,max}$	VA	295		366	
Rated power	$P_{ac,r}$	W	290		349	
Nominal grid voltage	U_{acnom}	V	230			
Minimum/Maximum grid voltage	U_{acmin}/U_{acmax}	V	184/276			
Maximum output current	I_{acmax}	A	1.28		1.59	
Nominal frequency	f_{nom}	Hz	50			
Minimum/Maximum frequency	f_{min}/f_{max}	Hz	45/55			
Maximum units per single-phase 20 A circuit			13 (L+N) Single-phase	48 (3L+N) Multi-phase	11 (L+N) Single-phase	39 (3L+N) Multi-phase
Maximum units per multi-phase 25 A circuit			For IQ Cable with 2.5 mm ² stranded conductors and using a 1.20 safety factor. The safety factors applied may vary based on local regulations or best practices, also upon the characteristic the OCPD selected.			
Recommended maximum units per single-phase/multi-phase IQ Cable section to reduce voltage rise in IQ Cable			13 (L+N) Single-phase	21 (3L+N) Multi-phase	11 (L+N) Single-phase	18 (3L+N) Multi-phase
			It is recommended to centre feed IQ Cable within microinverter branch circuits to minimize the voltage rise. These design limits should ensure voltage rise and line conductor resistance on the IQ Cable are maintained within acceptable limits. In locations with a risk of high grid voltage at the point of connection, it may be necessary to decrease the maximum number of microinverters on the IQ Cable section by as much as 50%.			
Protective class (all ports)			II			
Total harmonic distortion		%	< 5			
Power factor setting			1.0			
Power factor range	cos phi		0.8 leading ... 0.8 lagging			
Inverter maximum efficiency	η_{max}	%	97.24		97.23	
European weighted efficiency	η_{EU}	%	96.5			
Inverter topology			Isolated (HF Transformer)			
Nighttime power loss		mW	50			
MECHANICAL DATA			IQ7PLUS-72-2-INT		IQ7A-72-2-INT	
Ambient air temperature range			-40°C to 65°C (-40°F to 149°F)		-40°C to 60°C (-40°F to 140°F)	
Relative humidity range			4% to 100% (condensing)			

MECHANICAL DATA	IQ7PLUS-72-2-INT	IQ7A-72-2-INT
Overvoltage class AC port	III	
Number of input DC connectors (pairs) per single MPP-tracker	1	
AC connector type	Enphase IQ Cabling (refer to separate datasheet for cable and accessories)	
DC Connector type	Stäubli MC4 (using Q-DCC-2 adapter)	
Dimensions (H×W×D)	212 mm (8.3") × 175 mm (6.9") × 30.2 mm (1.2") (without mounting brackets)	
Weight (with mounting plate)	1.08 kg (2.38 lbs)	
Cooling	Natural convection – no fans	
Enclosure	Class II double-insulated, corrosion-resistant polymeric enclosure	
IP Rating	Outdoor - IP67	
Maximum altitude	2600 m	
Calorific value	37.5 MJ/unit	
STANDARDS	IQ7PLUS-72-2-INT	IQ7A-72-2-INT
Grid compliance (with IQ Relay)	TOR Erzeuger Typ A, C10/11, PPDS Annex 4, VFR 2019, VDE-AR-N 4105:2018, CEI 0-21, NEN1010, EN 50549-1, UNE206007-1/2	
Grid compliance (without IQ Relay)	G98, G98 NI, G99, G99 NI, G100	
Safety	EN IEC 62109-1, EN IEC 62109-2	
EMC	EN IEC 61000-3-2, 61000-3-3, 61000-6-2, 61000-6-3, EN IEC 50065-1, 50065-2-1	
Product labelling	CE, UKCA, and RCM	
Advanced grid functions ¹	Power export limiting (PEL), phase imbalance management (PIM), loss of phase detection (LOP), power factor control Q (U), cos (phi) (P)	
Microinverter communication	Power line communication (PLC) 110-120 kHz (Class B), Narrowband 200 Hz	

(1) Some of these functions require IQ Gateway Metered with current transformers and/or IQ Relay installed.

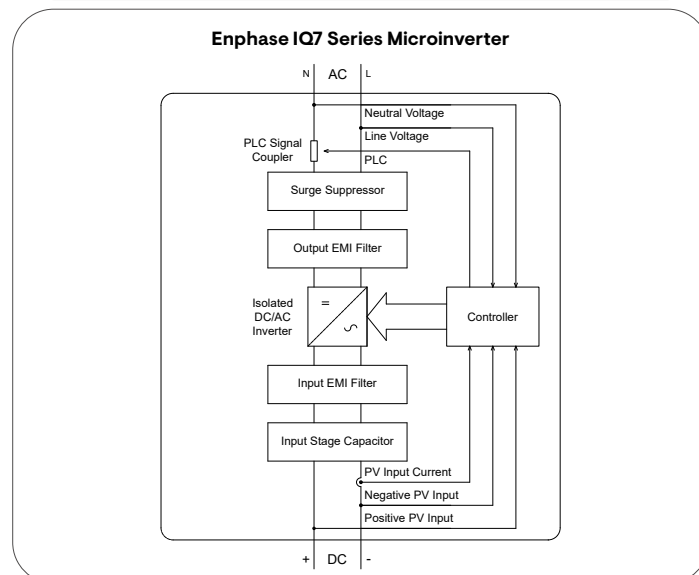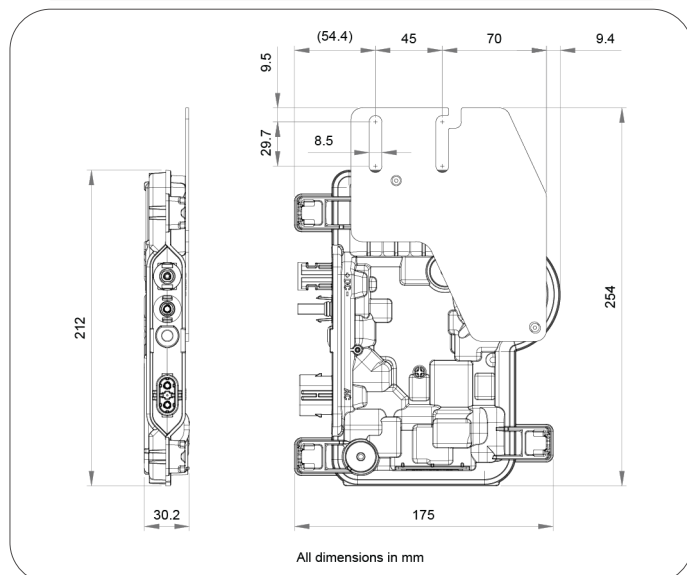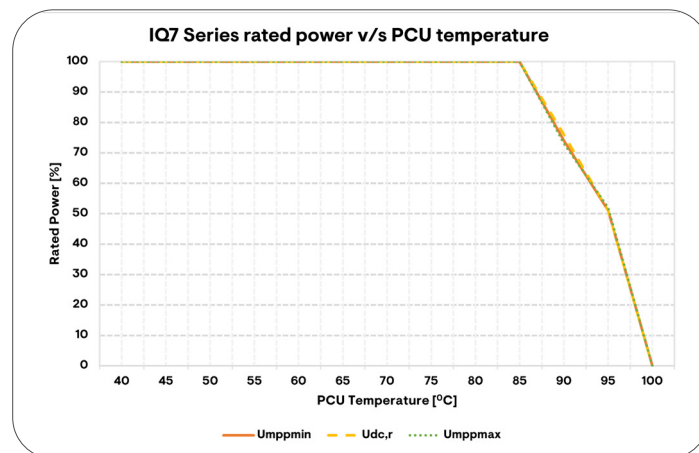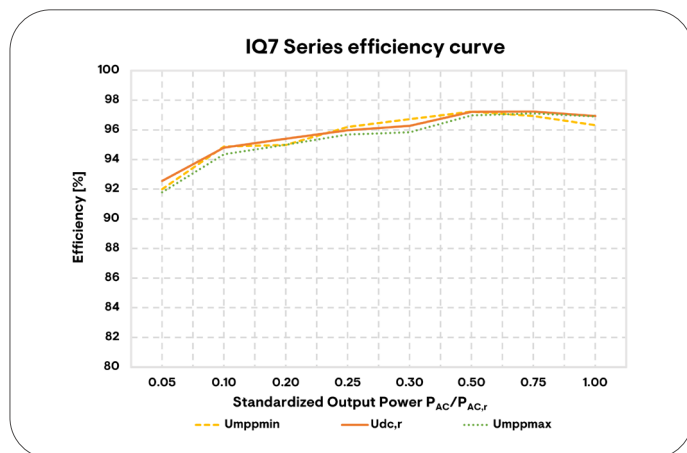

Assembled in China, India, and Mexico.

Revision history

REVISION	DATE	DESCRIPTION
DSH-00070-1.0	June 2023	Initial release