

SN100/110/125PT

Three Phase PV Inverters/ 5 MPPTs

Safe & Reliable

IP66 protection & C5 anti-corrosion rating
Type II SPD, both DC & AC sides
Built-in arc-fault circuit-interrupter

High-Performance Management

Accurate string current detection
Smart I/V curve scan
Local & remote maintenance

High Yield


Built-in PID recovery function
Compatible with bifacial PV modules
1.1 times continuous output overload

User-Friendly Design

Fuseless design-built in smart switch-disconnectors
Compatible with Al and Cu AC cables
Reversed battery terminal



Circuit Diagram

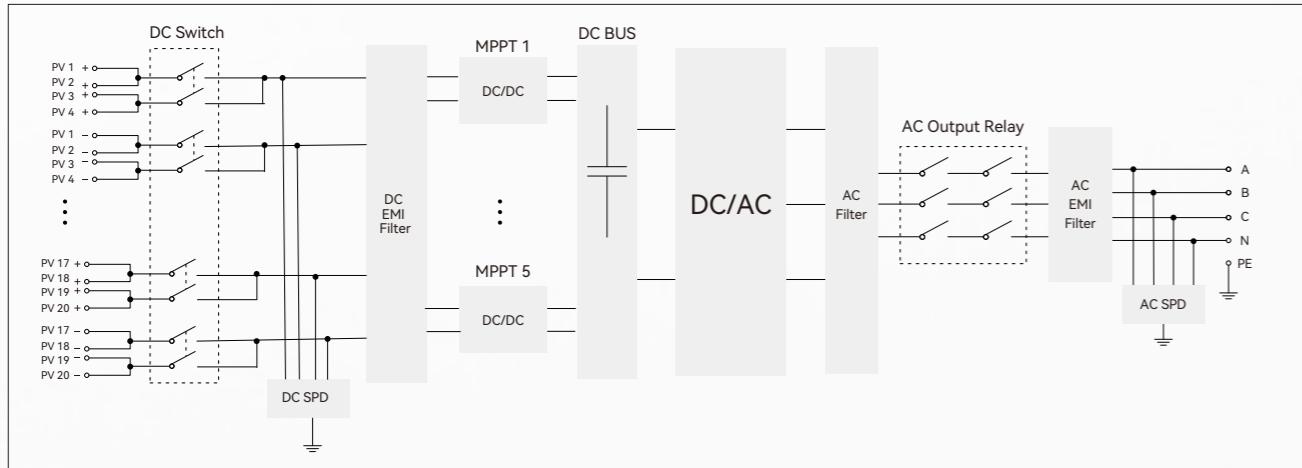

| Model | SN100PT | SN110PT | SN125PT |
|-------------------------------------|--|-------------------------------------|---------------------------------------|
| Input (PV) | | | |
| Max. PV input voltage | 1100V | | |
| Recommended max. PV power (STC) | 150kWp | 165kWp | 187.5kWp |
| Nominal PV input voltage | | 620V | |
| MPPT operating voltage range | 200V~1000V | | |
| Full power MPPT voltage range | 550V~850V | | |
| Startup PV voltage | 250V | | |
| Number of PV inputs | 16 (4 MPPTs, 4*4) | 20 (5 MPPTs, 5*4) | 20 (5 MPPTs, 5*4) |
| Max. current per MPPT | 60A/60A/60A/60A | 60A/60A/60A/60A | 60A/60A/60A/60A |
| Max. short circuit current per MPPT | 100A/100A/100A/100A | 100A/100A/100A/100A | 100A/100A/100A/100A |
| Output (grid) | | | |
| Nominal output power | 100kW | 110kW | 125kW |
| Max. output apparent power | 110kVA@35°C,100kVA@45°C,90kVA@50°C | 121kVA@35°C,110kVA@45°C,100kVA@50°C | 137.5kVA@35°C,125kVA@45°C,110kVA@50°C |
| Max. output current | 159.4A | 175.4A | 199.3A |
| Nominal grid voltage | 3L/PE or 3L/N/PE, 230V/400V | | |
| Grid voltage range | 320V~480V (According to local standards) | | |
| Nominal grid frequency | 50/60Hz | | |
| Power factor range | 0.8leading~0.8lagging | | |
| Harmonic (THD) | <3% | | |
| Efficiency | | | |
| Max. efficiency | 99.00% | | |
| EU efficiency | 98.50% | | |
| General data | | | |
| Display mode | LED, APP | | |
| Communication port | RS485, WIFI/4G/Ethernet, PLC(optional) | | |
| Weight | 75kg | | |
| Dimensions (W*H*D) | 1022*750*362 mm | | |
| Max. operating altitude | 4000m(>3000m derating) | | |
| Cooling method | Smart fan cooling | | |
| Humidity | 0~100% | | |
| Operating temperature | -25~60°C | | |
| Protection level | IP66 | | |
| Topology | Transformerless | | |
| Self-consumption at night | < 3.5W | | |
| Protection | | | |
| Leakage current protection | Yes | | |
| Anti-island protection | Yes | | |
| DC reverse protection | Yes | | |
| AC short circuit protection | Yes | | |
| PV string current detection | Yes | | |
| PID recovery | Yes | | |
| DC switch | Yes | | |
| Arc-fault circuit-interrupter | Yes | | |
| Surge protection | DC II/AC II | | |
| Insulation monitoring | Yes | | |
| Over-voltage protection | AC III/DC II | | |